

CKJ5-125, 250, 400, 630 AC Low Voltage Vacuum Contactor



► Main Technical Parameter


Product model	Rated voltage(V)		Rated current (main circuit) A	Main contact parameter			Power frequency voltage resistance V (effective value)		
	Main circuit	Control circuit		Distance between fixed and moving contact (mm)	Overtravel (mm)	Final pressure (N)	Main circuit	Auxiliary circuit	Control circuit
CKJ5-125	1140	36.110.220.380	125	1.8 ± 0.2	1 ± 0.2	30 ± 3	4200	2500	2000
CKJ5-250	1140	36.110.220.380	250	2 ± 0.2	1 ± 0.2	78 ± 7.8	4200	2500	2000
CKJ5-400	1140	36.110.220.380	400	2 ± 0.2	1 ± 0.2	117.6 ± 11.8	4200	2500	2000
CKJ5-600	1140	36.110.220.380	630	2 ± 0.2	1 ± 0.2	196 ± 19.6	4200	2500	2000

Product model	Making capacity	Breaking capacity	Limit breaking current (A)	Electricity life times		Mechanical life times	Weight
				AC-3	AC-4		
CKJ5-125	10le, 100 time	8le, 25 time	2000, 3 time	60×10^4	6×10^4	300×10^4	4kg
CKJ5-250	10le, 100 time	8le, 25 time	4500, 3 time	60×10^4	6×10^4	300×10^4	8kg
CKJ5-400	10le, 100 time	8le, 25 time	4500, 3 time	60×10^4	2×10^4	300×10^4	12kg
CKJ5-600	10le, 100 time	8le, 25 time	6000, 3 time	60×10^4	0.5×10^4	300×10^4	20kg

Note: le means main circuit n rated current

► Overall and installation dimensions



CKJ5-125 overall and installation dimensions

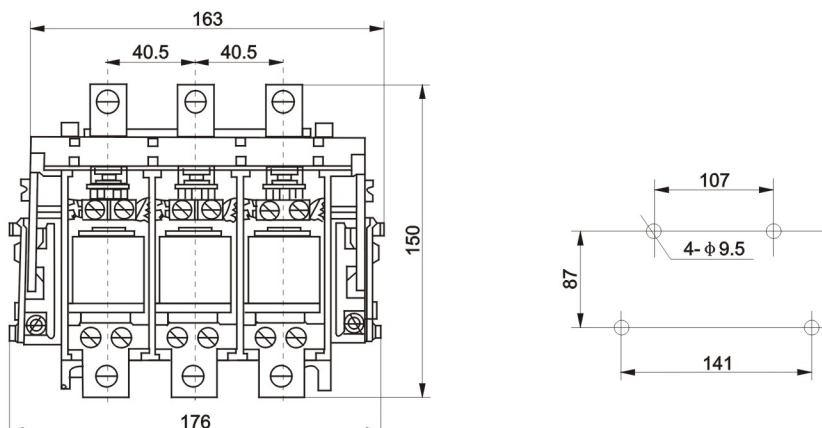



Vacuum Switch Series

CHINA · BAOGUANG GROUP

CKJ5-250
overall and installation dimensions

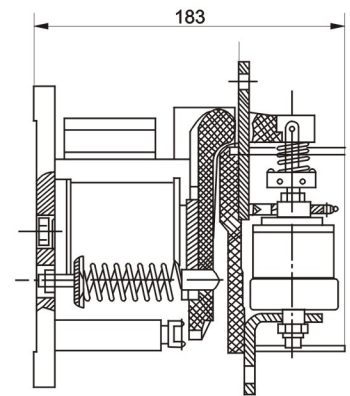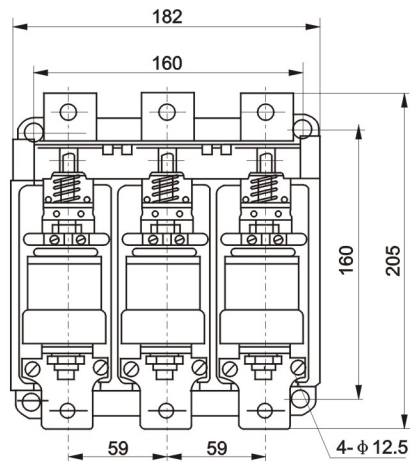

CKJ5-400
overall and installation dimensions

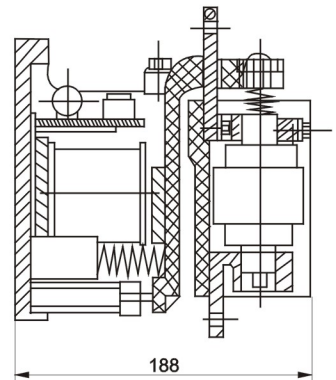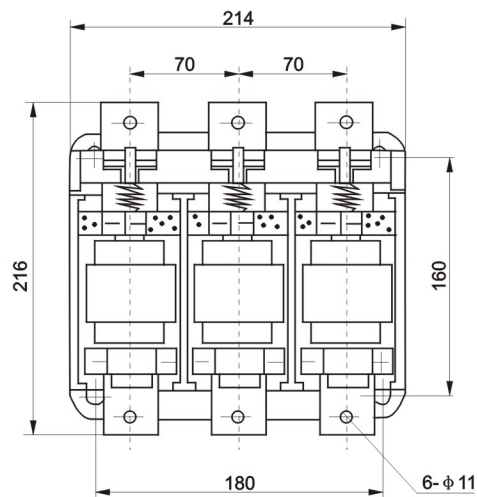

CKJ5-630
overall and installation dimensions

